

450TOC Analyzer



THORNTON

Leading Pure Water Analytics

450TOC Analyzer

Fast, Continuous Measurement

Compliant with USP, Ch P,
EP and JP

USB Data Logging and
Printer Output

Robust Portable Design



Portable, Real-time, Continuous Total Organic Carbon Measurement

METTLER TOLEDO

450TOC

Portable TOC Measurement

The 450TOC Total Organic Carbon analyzer from METTLER TOLEDO Thornton offers the fastest response to TOC changes available in an easily transportable TOC system. With its robust, portable design the 450TOC is an ideal tool for multi-point TOC measurement for point-of-use monitoring, water system diagnostics, and maintenance verification.

450TOC Features

- Portable, fast response technology for rapid detection
- Continuous measurement technology for superior system profiling and performance trending
- On-board data logging to USB memory stick
- USB printer support for hard-copy record keeping
- Compliant with USP, EP, Ch P and JP

Portable, Real-time TOC Measurement

- Reduce system and component verification time by 80% with portable, real-time total organic carbon analysis
- Ensure 100% system compliance with fast, simple and easy point-of-use monitoring
- Reduce system diagnostics time by 80% with fast, on-the-spot test results for TOC and conductivity
- Quickly capture and analyze results with on-board USB stick data collection with simple export to spread sheet programs
- Eliminate costly sampling errors by bringing the measurement directly to the sampling point



Quality Assurance Manager: With a fully compliant, portable TOC analyzer, I can quickly validate water quality at every point-of-use without having to worry about inconsistent sampling results.




Process Engineer: If anything happens in the water system, performing water system diagnostics with multi-point analysis is fast and easy. And with the real-time measurement, I get my results immediately.



Service Engineer: With the 450TOC, I can complete component performance verification right there, on the spot, without waiting for lab results.

Storage and Distribution

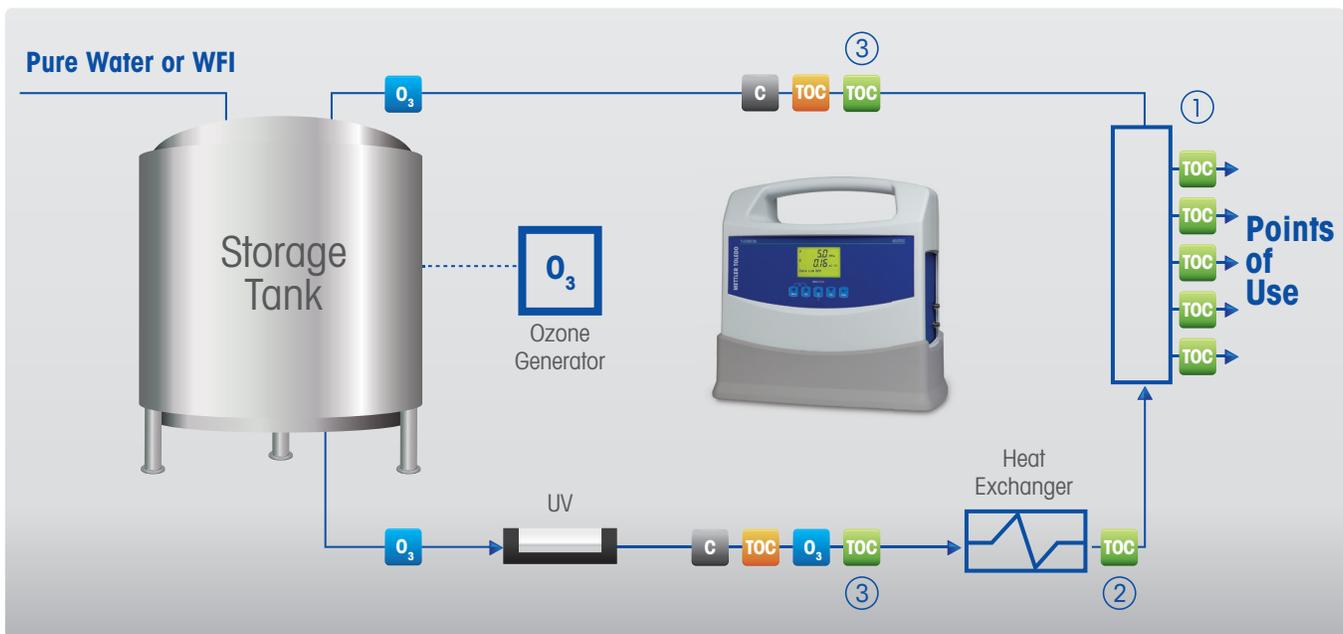

Measurement Points | **C** Conductivity | **TOC** Fixed TOC | **O₃** Dissolved Ozone | **TOC** Portable TOC

1. Expand routine monitoring to periodically include all points of use.
2. Verify component or sub-system performance or cleanliness following service, prior to system restoration.
3. Validate on-line TOC measurement against an external reference.

450TOC

Product Specifications

TOC Sensor

Measurement Range	0.05 - 1000 µgC/L (ppbC)
Accuracy	± 0.1 ppb C for TOC < 2.0 ppb (for water quality > 15 MΩ-cm) ± 0.2 ppb C for TOC > 2.0 ppb and < 10.0 ppb (for water quality > 15 MΩ-cm) ± 5% of measurement for TOC > 10.0 ppb (for water quality 0.5 to 18.2 MΩ-cm)
Repeatability	± 0.05 ppb C < 5 ppb, ± 1.0% > 5 ppb
Resolution	0.001 ppbC (µgC/L)
Analysis Time	Continuous
Initial Response Time	< 60 seconds
Limit of Detection	0.025 ppbC

Conductivity Sensor

Conductivity Accuracy	±1%, 0.02 to 20 µS/cm; ±3%, 20-100 µS/cm
Cell Constant Accuracy	2%
Temperature Sensor	Pt1000 RTD, Class A
Temperature Accuracy	± 0.25°C

Sample Water Requirements

Temperature	0 to 70°C
Particle Size	<100 micron
Minimum Water Quality	0.5 MΩ-cm (2 µS/cm), pH < 7.5 *
Flow Rate	20 mL/min
Pressure	4 to 85 psig (0.3 bar to 5.8 bar) at sample inlet connection

General Specifications

Overall Dimensions	334 x 185 x 324 mm (13.15"L x 7.3"W x 12.75"H)
Sample Connections	
Inlet	3 mm (0.125") O.D. (2 m (6') FDA compliant PTFE tubing supplied)
Outlet	Stainless steel drain tube (1.5 m (5') flexible tubing provided)
Inlet Filter	316SS, inline 60 micron
Weight	With base: 7.0 kg (15.4 lb.); without base: 6.1 kg (13.6 lb.)
Enclosure Material	Ignition resistant polystyrene resin meeting UL 94 V-0

General Specifications (continued)

Wetted Parts	316SS/quartz/PEEK/titanium/PTFE/silicone/FFKM/EPDM
Ambient Temperature/ Humidity Rating	5 to 50°C / 5 to 80% humidity, non-condensing
Power Requirements	100 - 240VAC, 50/60 Hz, 40W maximum
Local Indicators	Four LED lights for Fault, Error, Sensor Status and UV Lamp ON
Ratings/Approvals	CE Compliant, cULus Listed. Conductivity and temperature sensors traceable to NIST and ASTM D1125 and D5391 Meets ASTM D5173 Standard Test Method for On-Line Monitoring of Carbon Compounds in Water by UV Light Oxidation

* For power plant cycle chemistry samples, pH may be adjusted by measurement after cation exchange.
Specifications subject to change without notice



- | | |
|--------------------------|--------------------------------|
| 1. UV Lamp Access Cover | 6. Key Pad |
| 2. AC Power Connector | 7. UV Lamp Active LED |
| 3. USB Port | 8. Sample Outlet Connection |
| 4. Four-Line LCD Display | 9. Sample Inlet Connection |
| 5. Status LED Indicators | 10. Protective Base (Optional) |

Dimensions	With Base	Without Base
A	349 mm (13.75")	324 mm (12.75")
B	358 mm (14.1")	334 mm (13.15")
C	192 mm (7.56")	185 mm (7.30")

450TOC

Accessories and Ordering Information



Protective Base

A press-fit, rubber protective base provides a robust, non-skid surface that protects the 450TOC from impact damage. The base can be easily removed and replaced as needed.



Portable Calibration and SST Pump and Stand

The Calibration and SST Pump kit provides all the necessary equipment needed to perform a calibration or SST, and includes a hard-walled storage case. The separate, easel-style stand facilitates bench-top calibration and grab-sample analysis. The hinged design allows the stand to fold flat, fitting into the Calibration and SST Pump kit storage case for easy storage.



Storage and Transport Case

A hard-walled transportation and storage case provides safe and convenient handling when the 450TOC is not in use. A removable foam insert accommodates the 450TOC with, or without, the protective base.

Accessories

Accessories	Order No.
450TOC Protective Base	58 091 585
Kit, ISM Calibration and System Suitability Test (SST and calibration standards sold separately)	58 091 566
Stand, Calibration and System Suitability Test Kit	58 091 586
Case, 450TOC Storage and Transport, Hard Walled	58 091 587
High pressure regulator	58 091 552



Description

Portable 450TOC

Order No.

58 036 041

Consumables

Replacement UV lamp (recommended every 4,500 hours)

58 079 513

System Suitability Standards (For use with SST KIT # 58 091 566)

58 091 526

Calibration Solutions (For use with SST KIT # 58 091 566)

58 091 529

Combined Calibration and SST Solutions (For use with SST KIT # 58 091 566)

58 091 537

Filter element, high capacity (Pkg. of 2)

58 091 551

Spares

Filter Assembly, large capacity with elbow

58 091 582

Kit, Replacement Fuse M300

58 091 326

Kit, Replacement Fuse, 450TOC main board

58 091 583

Battery, for real-time clock

58 091 584

000 «Диаэм»

Москва

ул. Магаданская, д. 7, к. 3 ■ тел./факс: (495) 745-0508 ■ sales@dia-m.ru

www.dia-m.ru

С.-Петербург

+7 (812) 372-6040
spb@dia-m.ru

Новосибирск

+7 (383) 328-0048
nsk@dia-m.ru

Воронеж

+7 (473) 232-4412
vrn@dia-m.ru

Йошкар-Ола

+7 (927) 880-3676
nba@dia-m.ru

Красноярск

+7 (923) 303-0152
krsk@dia-m.ru

Казань

+7 (843) 210-2080
kazan@dia-m.ru

Ростов-на-Дону

+7 (863) 303-5500
rnd@dia-m.ru

Екатеринбург

+7 (912) 658-7606
ekb@dia-m.ru

Кемерово

+7 (923) 158-6753
kemerovo@dia-m.ru

Армения

+7 (094) 01-0173
armenia@dia-m.ru

