

OptiMax – Synthesize, Optimize, Characterize Products and Processes – Right on Time



Powerful & Easy Handling

The OptiMax™ workstation is compact, mobile, flexible, and quickly installed. The high performance heating and cooling system eliminates the need for bulky cryostats or cumbersome oil and ice baths in the range from $-40\text{ }^{\circ}\text{C}$ to $180\text{ }^{\circ}\text{C}$. A large window provides visibility into the illuminated reactor ensuring that changes in the reactor are visible.



One-Touch Control

Controlling the OptiMax is simple and intuitive. At the touch of a button, experiment parameters can be altered quickly. The graphical display of the touchscreen presents all experiment information in real time. A sequence of consecutive tasks can be programmed and run completely unattended, monitored by the safety system.



Unlimited Flexibility

Depending on the nature of the study, the appropriate configuration can be chosen from a wide range of reactors and stirrers. Handling and cleaning are easy. Reactor stands and cover holders make sure your equipment is always securely stored and within reach. Configuring is a breeze and assisted by self-recognition of probes and devices.



Quality Information

During the course of an experiment the OptiMax workstation collects a wealth of information. All data and events are recorded automatically, making the experiment consistently traceable and reproducible. In order to allow comprehensive data interpretation, the data can be imported into the powerful PC software iControl™ or MS-Excel®.



OptiMax™ – Your Synthesis Workstation

The current business environment in the chemical and pharmaceutical industry is challenging and requires chemists in chemical and process development to use more productive tools and to make the right decisions faster.

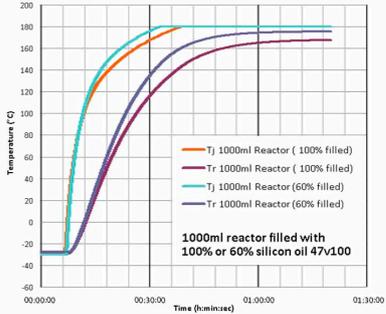
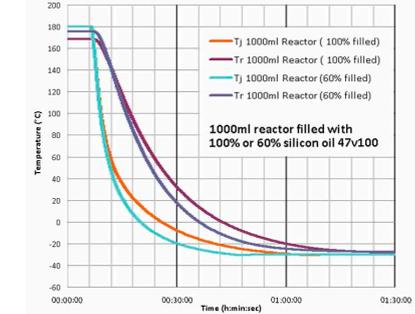
OptiMax improves the workflows in organic synthesis and process development labs significantly. It delivers new chemical compounds for application testing in a timely manner, helps characterize the process, reduces failures, and ensures sustainability of workflows and data in the lab of tomorrow.

METTLER TOLEDO

OptiMax – Synthesize, Optimize, Characterize

Products and Processes – Right on Time

OptiMax – Specifications

Heating and Cooling	Solid state heating-cooling system Heating: Electric Cooling: Peltier	Cooling performance Sample: 1 L of silicon oil 47v20 Peltier cooling: tap water	0 °C 35 W 20 °C 65 W 15 °C 40 °C 95 W
Temperature Range	–40 °C to 180 °C (jacket temperature)		
Temperature Modes	Jacket (Tj) or reaction mass (Tr) control, distillation and crystallization (constant or ramp)		
T-measurement	Tr, Taux: Pt100 class A	Tj, Tc: Pt100 class B	
Heating and Cooling Performance	Heating 	Cooling 	
Reactors	Single-piece reactor Working volume 250 mL nominal 400 mL 500 mL 700 mL 1000 mL 1150 mL	Two-piece reactor Working volume 250 mL nominal 370 mL 500 mL 830 mL 1000 mL 1310 mL	
Covers	250 mL, 500 mL, and 1000 mL – with 7 ports		250 mL, 500 mL, and 1000 mL – with 7 ports
Stirrer Drive	Eccentric overhead stirrer with variable shaft length		
Stirrer	Pitch-blade (glass, Alloy C-22) Anchor (glass, Alloy C-22) Half-moon (PTFE for single-piece)		
Stirring Speed	30 rpm to 1200 rpm (± 5 rpm)		
Reactor Window	50 mm x 110 mm		
Reactor Lights	12 LED (6 front lights, 6 back lights)		
Graphical Touchscreen	For operation, data and trend curve display Direct control and programmable TFT screen size: 7", resolution: 800 x 480 pixels		
Data Logging	Automatic logging of all data and events		
Connectivity and Data Transfer	CAN: Interface for peripherals USB: Data export to PC with memory stick Ethernet: Standard communication interface for direct connection to PC		
Supported Languages	English, German, French, Spanish, Japanese, Chinese		
Dimensions (WxDxH)	388 mm x 414 mm x 539 mm 388 mm x 414 mm x 780 mm, with stirrer		
Weight	35 kg		
Power Supply	100 V to 240 V AC, 50 Hz to 60 Hz, 1300 VA		



000 «Диаэм»

Москва

ул. Магаданская, д. 7, к. 3 ■ тел./факс: (495) 745-0508 ■ sales@dia-m.ru

www.dia-m.ru

Новосибирск
пр. Академика
Лаврентьева, д. 6/1
тел.
(383) 328-0048
nsk@dia-m.ru

Казань
ул. Парижской
Коммуны, д. 6
тел.
(843) 210-2080
kazan@dia-m.ru

С.-Петербург
ул. Профессора
Попова, д. 23
тел.
(812) 372-6040
spb@dia-m.ru

**Ростов-
на-Дону**
пер. Семашко, д. 114
тел.
(863) 303-5500
rnd@dia-m.ru

Пермь
Представитель
тел.
(342) 202-2239
perm@dia-m.ru

Воронеж
Представитель
тел.
(473) 232-4412
voronezh@dia-m.ru

Армения
Представитель
тел.
(094) 01-0173
armenia@dia-m.ru

Узбекистан
Представитель
тел.
(90) 354-8569
uz@dia-m.ru